


16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

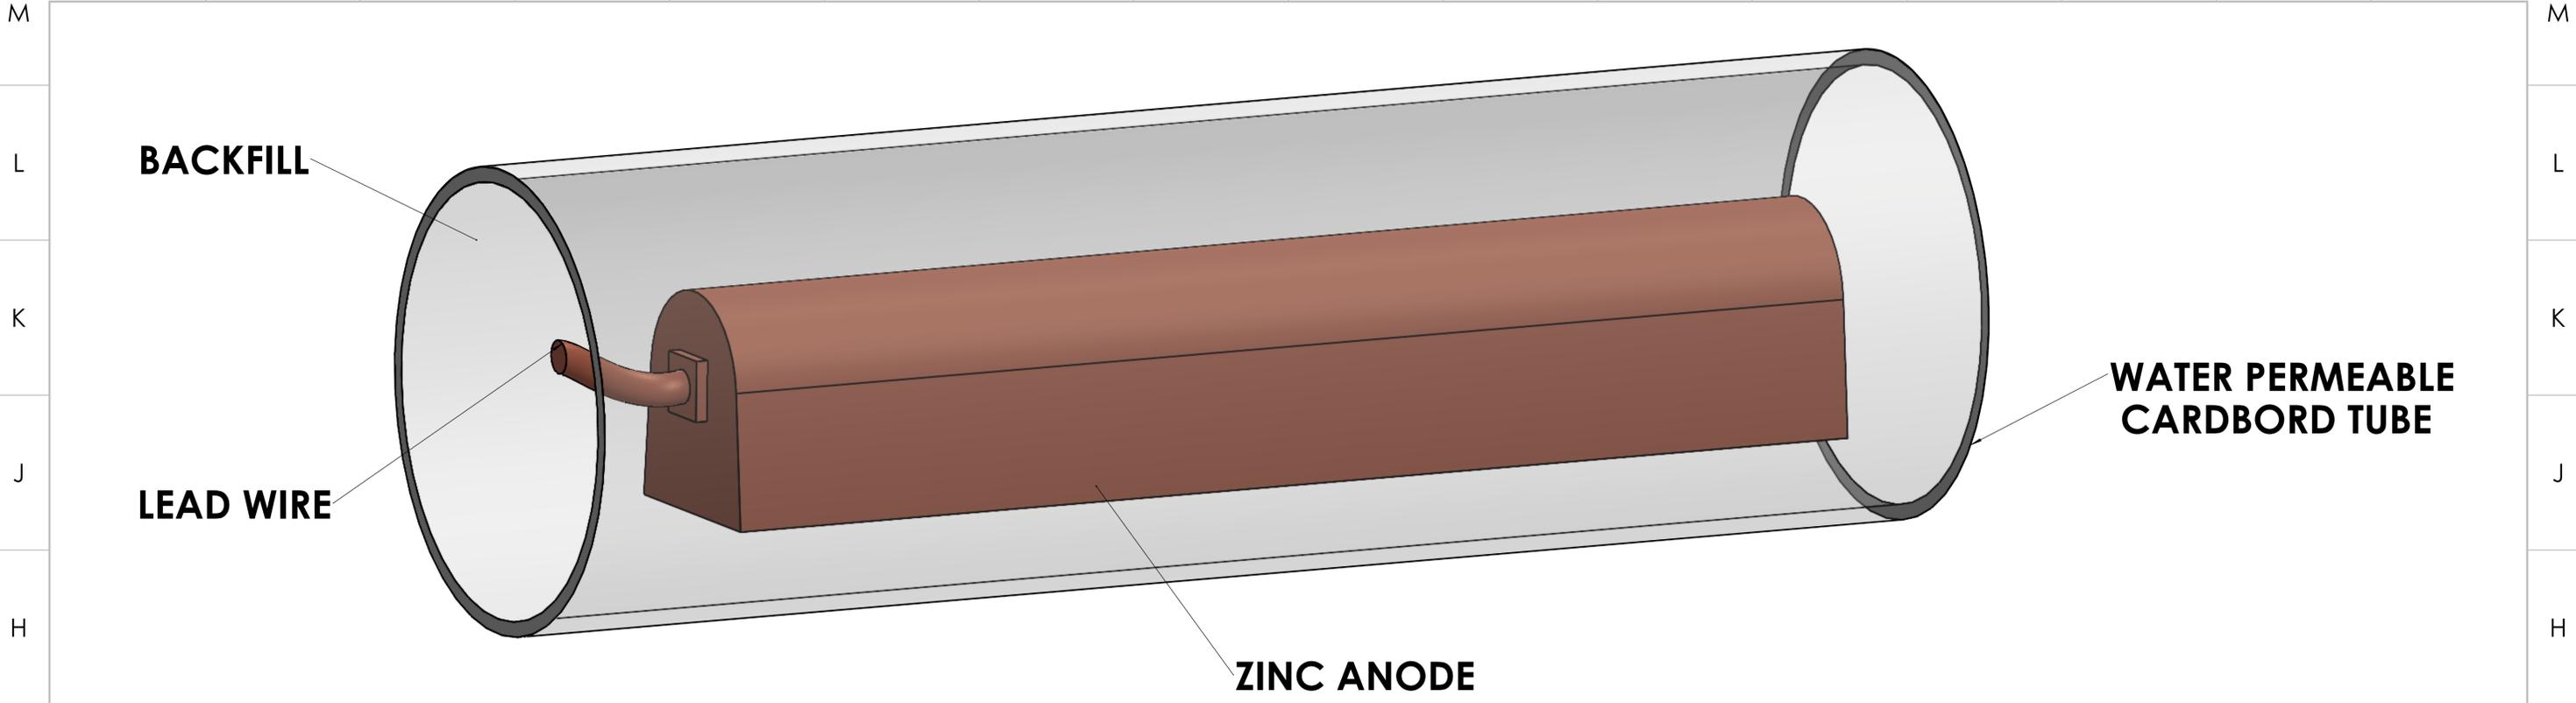

HIGH PURITY ZINC ANODES

PRODUCT CODE	NET WEIGHT OF ANODE	APPROX. WEIGHT PACKAGED	STANDARD PACKAGING
ZA-6	6 LBS	14 LBS	4" DIA X 15 1/2" WATER PERMEABLE CARDBOARD TUBE
ZA-12	12 LBS	28 LBS	4" DIA X 27 1/2" WATER PERMEABLE CARDBOARD TUBE
ZA-24	24 LBS	52 LBS	4" DIA X 51 1/2" WATER PERMEABLE CARDBOARD TUBE

CUSTOM PACKAGING UPON REQUEST

WIRE: STANDARD 10FT (3M) AWG #10 STRANDED COPPER LEAD WIRE WITH TW75 WHITE INSULATION, SILVER SOLDERED TO 1/4" DIA ELECTRO GALVANIZED STEEL CORE EXTENDING 100% OF ANODE LENGTH - CUSTOM WIRE SELECTION UPON REQUEST

BACKFILL: GROUND HYDRATED GYPSUM - 77% +/- 1% ; ANHYDROUS SODIUM SULPHATE - 8% +/- 1% ; POWDERED WYOMING BENTONITE - 15% +/- 1%  
SPECIFICATION ASTM B 418 (LATEST EDITION) TYPE II

UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN MILLIMETERS  
TOLERANCES:  
LINEAR: ± 2 MM  
ANGULAR: ± 1°  
BRK/FILE SHARP CORNER: 1 MM MAX  
SURFACE FINISH: 20 - 50

THIS DRAWING IS THE PRIVATE PROPERTY OF "ATLANTIC" AND CAN NOT BE USED DIRECTLY OR INDIRECTLY WITHOUT THE WRITTEN PERMISSION OF THE COMPANY. ALL LEGAL RIGHTS RESERVED.

**ATLANTIC**

	NAME	SIGNATURE	DATE	HEAT TREATMENT:
DRAWN	ATLANTIC		09-09-2025	
CHK'D				MATERIAL:
APPV'D				ZINC
MFG				PROJECT:
Q.A				08
				WEIGHT:

<b>PART NAME:</b>	ZINC ANODE	<b>REVISION:</b>
		A
<b>PART NUMBER:</b>		
SHEET 1 OF 1	SCALE:1:2	SIZE: A1

REVISIONS

REV.	DATE	DESCRIPTION	EARLIER WAS	CHANGED TO
A	09-09-2025	DRAWING RELEASED	INITIAL RELEASE	INITIAL RELEASE

16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1